

HT43 RTJ PRO



PERFORMANCE & EASE OF USE

- > Outstanding rough terrain driving features: 4 wheel drive and steer, oscillating axle
- > Up to 4 simultaneous, proportional movements
- > Dual load capacity
230 kg - 450 kg
- > 3D jib

OPTIMIZED SERVICEABILITY

- > Self-diagnosis tool integrated on the lower control box
- > Fully modular basket quick and easy to repair
- > Easy access to all components

MAXIMUM COMFORT & SAFETY FEELING

- > Haulotte Activ'Shield Bar 2.0
- > Smooth and precise controls
- > Rugged boom design

HT43 RTJ PRO


ROUGH TERRAIN TELESCOPIC BOOMS

TECHNICAL DATA

HT43 RTJ PRO

Working height	42.2 m
Platform height	40.2 m
Horizontal outreach	20.2 m
Lift capacity	230 kg (2 pers.) - 450 kg (3 pers.)
F x G Platform size	2.44 x 0.91 m
H Length - stowed	14.8 m
A Storage / transport length	12.3 m
B Overall width	2.5 m
Width - with extended axles	3.3 m
C Height - stowed	3.05 m
Storage / transport height	3.05 m
Vertical jib rotation	140° (+ 70° / - 70°)
Horizontal jib rotation	150° (+ 75° / - 75°)
Platform rotation	180° (+ 90° / - 90°)
Turntable rotation	360° continuous
Tailswing	2.8 m
D Wheelbase	3.5 m
E Ground clearance	38 cm
Tilt	3°
Drive speed	0.3 - 5 km/h
Maximum wind speed rating	45 km/h
Gradeability	40 %
Turning radius - outside	5.74 m
Tyres - foam-filled	445 / 65 - 22.5
Engine	Deutz, 55 kW, Turbo (Stage 5 in EU); Perkins, 62.5 kW, Turbo (Stage 3A in NRC)
Weight	21 400 kg

Some options increase the machine weight.

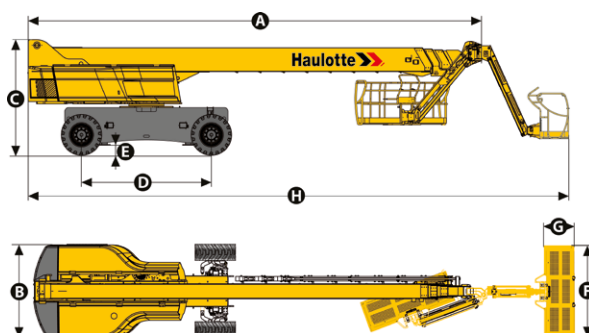

STANDARD EQUIPMENT

- > Haulotte Activ'Shield Bar 2.0
- > 3D jib
- > 4 simultaneous movements and proportional controls
- > Dual load capacity 230 kg (2 persons) - 450 kg (3 persons)
- > Upper control box protection cover and tool tray
- > Large modular platform with drop bar entry gate
- > Basket compensation $\pm 10^\circ$
- > Power to platform 110 / 220 V
- > 4 wheel drive and steer
- > 2 extendables axles
- > Front oscillating axle increasing stability on uneven ground
- > Differential wheel lock increasing rough terrain capacity
- > 360° continuous turret rotation
- > Swing out engine tray for ease of maintenance
- > Electric pump system and emergency descent
- > Driving beacon
- > Travel alarm
- > Towing hooks
- > Telematics ready

OPTIONS AND ACCESSORIES

- > Lateral swing door gate
- > Glazier pack
- > Pipe cradle
- > USB port
- > Working light
- > Air line to platform
- > Non-marking tires
- > On-board hydraulic generator 3.5kW (with or without oil cooler)
- > Arctic weather package
- > Cold weather kit
- > Hydraulic oil cooler
- > Hydraulic oil for warm countries
- > Biodegradable hydraulic oil
- > Outrigger pads
- > Sherpal telematics (tracker+subscription)

